


DATA SHEET

EM 160L E2M 01 | 126549

ruck.eu
VENTILATOREN

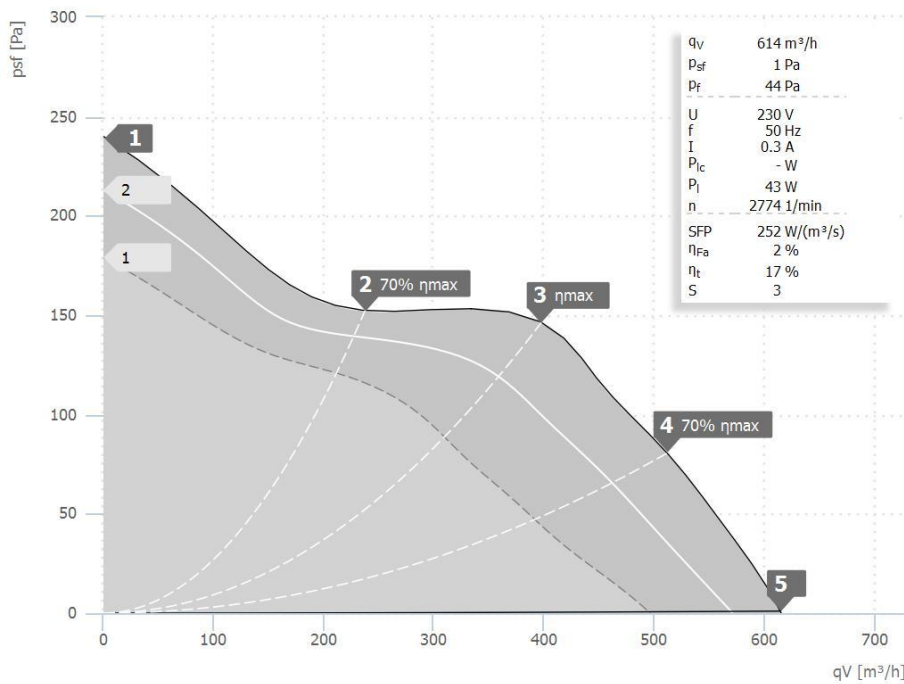

- Diagonal impeller with stator
- With Plastic housing
- 3-step
- Integrated thermostatic switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P ₁	W	42	40	44	45	43
RPM n	1/min	2788	2802	2739	2738	2774
SPL inlet L _{WA5}	dB(A)	67	67	66	67	68
SPL outlet L _{WA6}	dB(A)	67	67	66	67	69
SPL casing break out L _{WA2}	dB(A)	54	58	57	56	56

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	68	33	38	53	65	62	61	56	51
Outlet	L _{WA6}	69	35	42	55	62	66	61	59	53
Casing	L _{WA2}	56	27	26	43	54	47	47	40	31

EM 160L E2M 01 126549	
Voltage U _N	230 V 1~
Current I _{max}	0,3
Ambient Temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,5 kg

