


serie 40



Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая

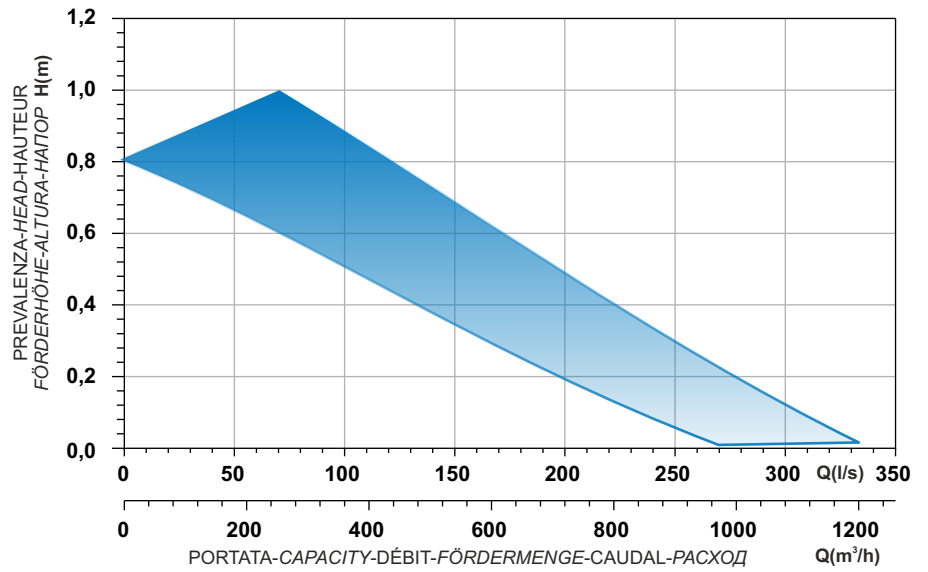

Code	Type	Motor type	Power supply	Rotation speed r.p.m.	Discharge	Weight Kg
Ghisa - Cast Iron - Fonte - Grauguss - Hierro fundido - Чугун EN-GJL-250						
9006476	GM40B813R1-4N2KA2	M813T-5,2-400/50YY-IE	3ph 400/690V-50Hz	706	DN 400	135
9006477	GM40B813R2-4N2KA2	M813T-5,2-400/50YY-IE	3ph 400/690V-50Hz	706	DN 400	135
9002264	GM40B813R3-4N2KA2	M813T-8-400/50YY-IE	3ph 400/690V-50Hz	715	DN 400	130
Acciaio inossidabile - Stainless steel - Acier inoxydable - Edelstahl - Acero inoxidable - Нержавеющая сталь AISI 316L						
9001468	XM40B813R1-6N2LA5	M813T-4,5-400/50YY-IE	3ph 400/690V-50Hz	701	DN 400	135
9009596	XM40B813R2-6N2LA5	M813T-4,5-400/50YY-IE	3ph 400/690V-50Hz	701	DN 400	135
9001477	XM40B813R3-6N2LA5	M813T-8-400/50YY-IE	3ph 400/690V-50Hz	715	DN 400	135

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

▽ LIVELLO MINIMO DI SOMMERSIBILITÀ
MINIMUM SUBMERSIBLE LEVEL
NIVEAU MINIMUM D'IMMERSION
MINDESTWASSERSTAND
NIVEL SUMERGIBLE MINIMO
МИНИМАЛЬНАЯ ГЛУБИНА ПОГРУЖЕНИЯ

