



serie 60

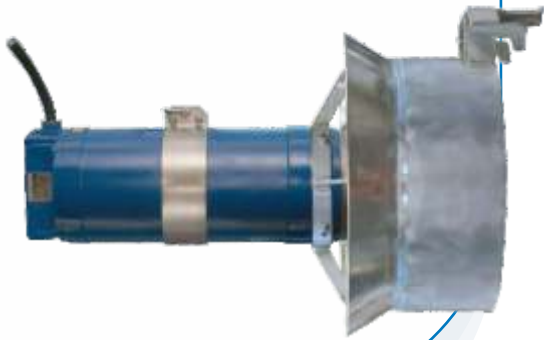

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая

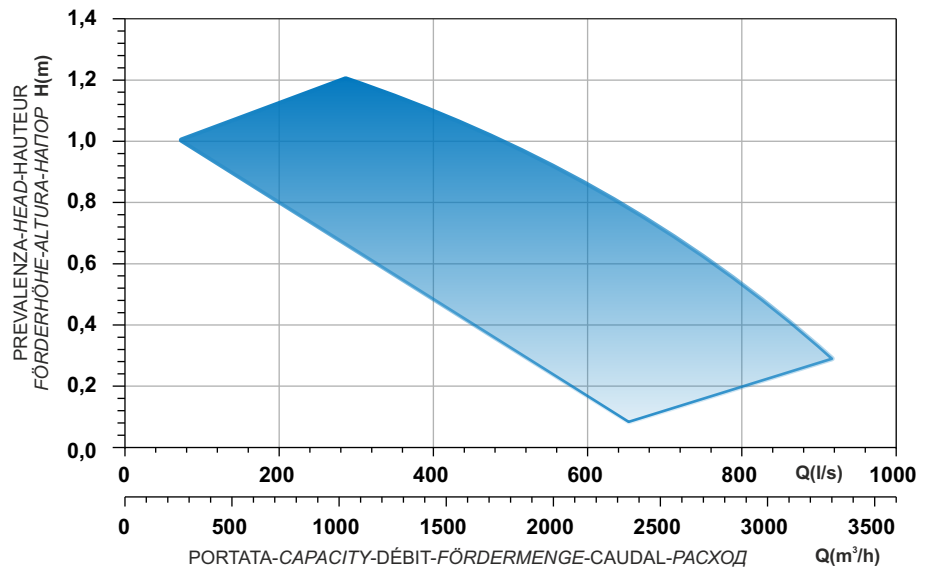

| Code | Type | Motor type | Power supply | Rotation speed r.p.m. | Discharge | Weight Kg |
|--|---------------------------|-----------------------|-------------------|-----------------------|-----------|-----------|
| Ghisa - Cast Iron - Fonte - Grauguss - Hierro fundido - Чугун EN-GJL-250 | | | | | | |
| 9006146 | GM60B1216R1-4N2KA2 | M1216T-12-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 260 |
| 9006148 | GM60B1216R2-4N2KA2 | M1216T-14-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 260 |
| 9006478 | GM60B1216R3-4N2KA2 | M1216T-16-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 260 |
| 9006558 | GM60B1016R3-4N2KA2 | M1016T-20-400/50YY-IE | 3ph 400/690V-50Hz | 568 | DN 600 | 260 |
| Acciaio inossidabile - Stainless steel - Acier inoxydable - Edelstahl - Acero inoxidable - Нержавеющая сталь AISI 316L | | | | | | |
| 9001525 | XM60B1216R1-6N2LA5 | M1216T-12-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 275 |
| 9001524 | XM60B1216R2-6N2LA5 | M1216T-14-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 275 |
| 9001523 | XM60B1216R3-6N2LA5 | M1216T-16-400/50YY-IE | 3ph 400/690V-50Hz | 475 | DN 600 | 275 |
| 9006479 | XM60B1016R3-6N2LA5 | M1016T-20-400/50YY-IE | 3ph 400/690V-50Hz | 568 | DN 600 | 275 |

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

▽ LIVELLO MINIMO DI SOMMERSIBILITÀ
MINIMUM SUBMERSIBLE LEVEL
NIVEAU MINIMUM D'IMMERSION
MINDESTWASSERSTAND
NIVEL SUMERGIBLE MINIMO
МИНИМАЛЬНАЯ ГЛУБИНА ПОГРУЖЕНИЯ

