




- ECO
- Powerful (max performances)
- Silence mode
- Leave Home
- Timer
- Info
- Operation Lock
- One Touch Clean
- Washable filter
- Active Carbon filter

Benefits and features

Performance Multi wall unit

Our classic air conditioning gets a new, appealing design. Thanks to its compact design, this unit can be integrated almost anywhere. It melts up to an outside temperature of -15 °C. Combine the multisplit variant with other **HITACHI** air conditioners, and enjoy the year's highest air conditioning enjoyment.

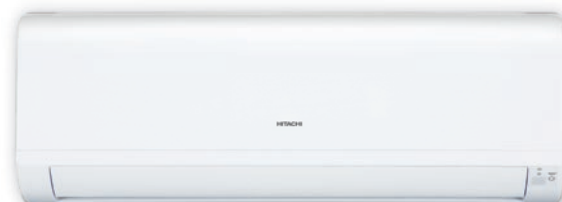

35

Indoor unit			RAK-15QPC	RAK-18RPC	RAK-25RPC	RAK-35RPC	RAK-50RPC
Nominal cooling capacity		kW	1.5 (1.0)	1.8	2.5	3.5	5.0
Nominal heating capacity		kW	1.5 (1.0)	2.5	3.4	4.2	6.5
Dimensions (H × W × D)		mm	280 × 780 × 218	280 × 780 × 218	280 × 780 × 218	295 × 900 × 230	295 × 900 × 230
Sound pressure level *	Cooling	dB(A)	20-24-30-34	21-24-33-37	22-24-33-40	25-26-36-43	25-28-39-46
Super low - low - medium - high *	Heating	dB(A)	20-24-32-35	19-22-33-38	20-23-34-41	26-27-36-44	27-31-39-46
Sound power level		dB(A)	47	51	54	57	60
Connecting piping dimension (liquid / gas)		inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"

Refer to page 63 for default values

HITACHI