


Shaded-pole motors

EM 21

Standard version:

- Direction of rotation clockwise
- Mounting position with horizontal shaft
- Mode of operation S1
- Sintered sleeve bearings with additional lubricant depot
- Permissible ambient temperature 0 – 60° C.

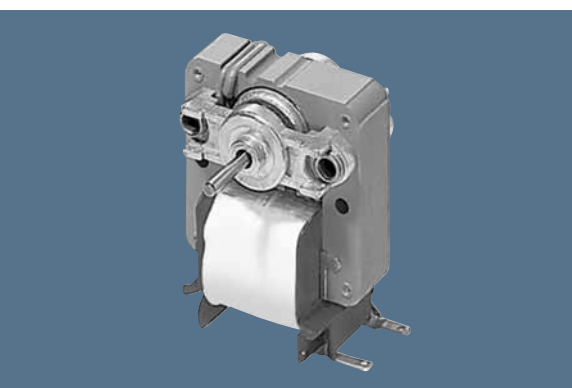

Nominal data	Output power	Input power	Nominal voltage	Frequency	Nominal speed	Nominal current	Rated torque	Mass	Dimensions (mm)			Curve
Type	W	W	V	Hz	rpm	mA	Ncm	kg	a	b	c	
EM 2108	0,6	6,2	230	50	2100	60	0,28	0,20	8	31	24	1
EM 2112	1,0	9,5	230	50	2200	90	0,46	0,25	12	35	32	2
EM 2118	1,5	12,0	230	50	2300	100	0,7	0,32	18	41	38	3
EM 2124	2,0	13,5	230	50	2350	120	1,0	0,40	24	47	44	4

