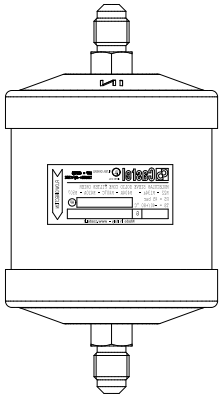
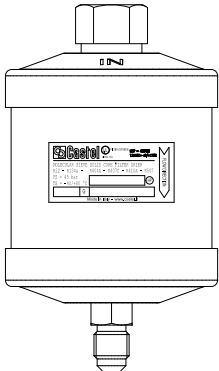


FILTRI DISIDRATATORI A CARTUCCIA SOLIDA 100% SETACCIO MOLECOLARE - ATTACCHI SAE FLARE - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.
 SOLID CORE FILTER DRIERS 100% MOLECULAR SIEVES - SAE FLARE CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.
 ФИЛЬТРЫ-ОСУШИТЕЛИ С ТВЕРДЫМ СЕРДЕЧНИКОМ ИЗ 100% МОЛЕКУЛЯРНОГО СИТА, С СОЕДИНИТЕЛЬНЫМИ КОНЦАМИ ПОД РАЗВАЛЬЦОВКУ SAE, УТВЕРЖДЕННЫЕ UNDERWRITERS LABORATORIES INC

Disegno Drawing Чертеж	N° catalogo Part number N° по каталогу	Codice internazionale International code Международный код	Attacchi SAE Flare Connections SAE Flare Соединительные концы под развальцовку SAE	Cubatura nominale Nominal volume Номинальный объем [cm³]	PS [bar] PS [бар]	TS [°C]		Confezione n° pz Package pcs Упаковка, шт
						min мин	max макс	
	DF303/2	032	1/4"	50	47 (1)	-40	+80	25
	DF303/3	033	3/8"	50				25
	DF305/2	052	1/4"	80				25
	DF305/3	053	3/8"	80				25
	DF308/2	082	1/4"	130				25
	DF308/3	083	3/8"	130				25
	DF308/4	084	1/2"	130				25
	DF316/2	162	1/4"	250				15
	DF316/3	163	3/8"	250				15
	DF316/4	164	1/2"	250				15
	DF316/5	165	5/8"	250				15
	DF330/3	303	3/8"	500				10
	DF330/4	304	1/2"	500				10
	DF330/5	305	5/8"	500				10
	DF341/4	414	1/2"	670				6
	DF341/5	415	5/8"	670				6
	DF341/6	416	3/4"	670				6
	DF303/2F	-	1/4"	50	47 (1)	-40	+80	25
	DF305/2F		1/4"	80				25
	DF308/2F		1/4"	130				25
	DF308/3F		3/8"	130				25
	DF316/3F		3/8"	250				15

Note:

(1): MWP = 680 psi in conformità a omologazione UL

(1): MWP = 680 psi according to UL approval

Примечание.

(1). Максимальное рабочее давление = 680 psi

соответствует значению, одобренному UL.