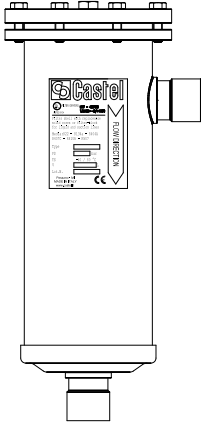


FILTRI DISIDRATORI A CARTUCCIA SOLIDA RICAMBIABILE - ATTACCHI DI RAME - OMOLOGATI DA UNDERWRITERS LABORATORIES INC.  
 FILTER DRIERS WITH REPLACEABLE SOLID CORE - COPPER CONNECTIONS - APPROVED BY UNDERWRITERS LABORATORIES INC.  
 ФИЛЬТРЫ-ОСУШИТЕЛИ СО СМЕННЫМ ТВЕРДЫМ СЕРДЕЧНИКОМ И С МЕДНЫМИ СОЕДИНИТЕЛЬНЫМИ ЭЛЕМЕНТАМИ,  
 УТВЕРЖДЕННЫЕ UNDERWRITERS LABORATORIES INC.

Disegno Drawing Чертеж	N° Catalogo Part Number N° по каталогу		Attacchi ODS ODS Connections Соединит. концы под пайку внахлест ODS		Tipo cartucce Cores type Тип сердеч- ника	N° cartucce N° of cores Тип сердеч- ника	Cubatura nominale Nominal volume Номиналь- ный объем [cm³]	PS [bar]	TS [°C]	Confezione n° pz Package pcs Кол-во штук в упаковке	
	Coperchio filettato Threaded cover Резьбовая крышка	Coperchio cieco Blind cover Глухая крышка	Ø [in.] / [дюйм]	Ø [mm]							PS [бар]
	4411/5A	4411/5B	5/8"	16	4490/A 4490/B 4490/AA 4490/AB	1	800	45 (1)	-40	+80	1
	4411/7A	4411/7B	7/8"	22							
	4411/M28A	4411/M28B	-	28							
	4411/9A	4411/9B	1.1/8"	-							
	4411/11A	4411/11B	1.3/8"	35							
	4411/13A	4411/13B	1.5/8"	-							
	4411/M42A	4411/M42B	-	42							
	4411/17A	4411/17B	2.1/8"	54		2	1600				
	4411/21A	4411/21B	2.5/8"	-							
	4412/7A	4412/7B	7/8"	22							
	4412/M28A	4412/M28B	-	28							
	4412/9A	4412/9B	1.1/8"	-							
	4412/11A	4412/11B	1.3/8"	35							
	4412/13A	4412/13B	1.5/8"	-							
	4412/M42A	4412/M42B	-	42							
	4412/17A	4412/17B	2.1/8"	54		3	2400				
	4413/7A	4413/7B	7/8"	22							
	4413/9A	4413/9B	1.1/8"	-							
	4413/11A	4413/11B	1.3/8"	35							
	4413/13A	4413/13B	1.5/8"	-							
	4413/M42A	4413/M42B	-	42							
	4413/17A	4413/17B	2.1/8"	54		4	3200				
	4414/11A	4414/11B	1.3/8"	35							
	4414/13A	4414/13B	1.5/8"	-							
4414/M42A	4414/M42B	-	42								
4414/17A	4414/17B	2.1/8"	54								

Note:

- (1): MWP = 470 psi in conformità a omologazione UL  
 (1): MWP = 470 psi according to UL approval

Примечание.

- (1). Максимальное рабочее давление = 470 psi соответствует значению, одобренному UL.