


FTXP-M + RXP-M

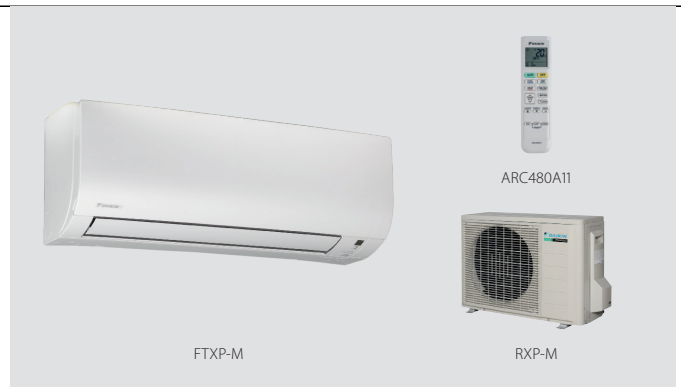

Indoor unit		FTXP	20M	25M	35M	50M	60M	71M	
Casing	Colour		White						
Dimensions	Unit	HeightxWidthxDepth	mm	286x770x225			295x990x263		
Sound power level	Cooling		dBA	55	58	59	60	62	
Sound pressure level	Cooling	High/Medium/Low/Silent operation	dBA	39/33/25/19	40/33/26/19	43/34/27/20	43/39/34/27	45/41/36/30	46/42/37/32
	Heating	Super high/High/Medium/Low/	dBA	-/39/34/28/21	-/40/34/28/21	-/40/35/29/21	42/38/33/30/-	44/40/35/32/-	45/41/36/33/-
Control systems	Infrared remote control		ARC480A53						
	Wired remote control		BRC944B2 / BRC073A1			-			

Efficiency data			FTXP + RXP	20M + 20M	25M + 25M	35M + 35M	50M + 50M	60M + 60M	71M + 71M
Cooling capacity	Min./Nom./Max.		kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.50/4.0	1.7/5.0/6.0	1.7/6.0/7.0	2.3/7.1/7.3
Heating capacity	Min./Nom./Max.		kW	1.30/2.50/3.50	1.30/3.00/4.00	1.30/4.00/4.80	1.7/6.0/7.7	1.7/7.0/8.0	2.3/8.2/9.0
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.50/0.72	0.31/0.65/0.72	0.29/1.01/1.30	0.320/1.385/1.826	0.332/1.824/2.980	0.449/2.689/3.274
	Heating	Min./Nom./Max.	kW	0.25/0.52/0.95	0.25/0.69/0.95	0.29/1.00/1.29	0.440/1.579/2.356	0.456/1.928/2.787	0.617/2.571/3.306
Space cooling	Capacity	Pdesign	kW	2.00	2.50	3.50	5.0	6.0	7.1
	Energy efficiency class			A++					
	SEER			6.79	6.92	6.62	7.30	6.82	6.20
	Annual energy consumption			kWh/a	103	126	186	240	308
Space heating (Average climate)	Capacity	Pdesign	kW	2.20	2.40	2.80	4.60	4.80	6.20
	Energy efficiency class			A++					
	SCOPnet/A			4.69	4.65	4.68	4.42	4.12	4.04
	Annual energy consumption			kWh/a	662	728	845	1,463	1,638
Nominal efficiency	EER			4.02	3.83	3.49	3.61	3.29	2.64
	COP			4.77	4.36	4.02	3.80	3.63	3.19

Outdoor unit			RXP	20M	25M	35M	50M	60M	71M
Dimensions	Unit	HeightxWidthxDepth	mm	550x658x275			734x870x373		
Sound power level	Cooling		dBA	60		62	61	63	66
	Heating		dBA	61		62	61	63	65
Sound pressure level	Cooling	High/Nom.	dBA	46/-		48/-	-/47	-/49	-/52
	Heating	High/Nom.	dBA	47/-		48/-	-/49		-/52
Operation range	Cooling	Ambient	Min.~Max.	°CDB					
				-10~46					
Operation range	Heating	Ambient	Min.~Max.	°CDB					
				-15~18					
Refrigerant	Type/Charge/GWP		kg/TCO ₂ eq	R-32/0.55/0.37/675.0		R-32/0.70/0.48/675.0		R-32/0.90/0.61/675	
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240					

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN19-046

02/19



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.