

Model: ASHG12KXCA



Wireless R.C.



Wireless
LAN Interface




Specifications

Model No.	Indoor unit		ASHG12KXCA	
	Outdoor unit		AOHG12KXCA	
Power Source			Single phase, ~230V, 50Hz	
Capacity	Cooling	kW	3.4 (0.6-5.3)	
	Heating		5.0 (0.6-9.0)	
Input Power	Cooling/Heating	kW	0.670/1.020	
EER	Cooling	W/W	5.09	
COP	Heating		4.90	
Pdesign	Cooling/Heating(-10°C)	kW	3.4/3.5	
SEER	Cooling	W/W	8.50	
SCOP	Heating (Average)		5.10	
Energy Efficiency Class	Cooling		A+++	
	Heating (Average)		A+++	
Max. Operating Current	Cooling/Heating	A	9.0/16.0	
Annual Energy Consumption	Cooling	kWh/a	140	
	Heating		961	
Moisture Removal		l/h	1.2	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	46/42/38/28
	Indoor (Heating)	H/M/L/Q		48/43/39/30
	Outdoor(Cooling/Heating)	High		44/43
Sound Power Level	Indoor(Cooling/Heating)	High		58/62
	Outdoor(Cooling/Heating)	High		57/57
Airflow Rate	Indoor / Outdoor (Cooling)	High	m³/h	670/2,230
	Indoor / Outdoor (Heating)			810/1,975
Net Dimensions H x W x D	Indoor	mm	293×786×378	
	Outdoor	mm	704×820×315	
Weight	Indoor	kg(lbs)	20 (44)	
	Outdoor	kg(lbs)	41 (90)	
Connection Pipe Diameter (Liquid / Gas)		mm	6.35/9.52	
Drain hose Diameter (I.D./O.D.)			11.8/15.0 to 16.8	
Max Pipe Length (Pre-Charge)		m	15 (15)	
Max Height Difference			10	
Operation Range	Cooling	°CDB	-10 to 43	
	Heating		-15 to 24	
Refrigerant	Type (Global Warming Potential)		R32 (675)	
	Charge	kg(CO2eq-T)	1.30 (0.878)	

Dimensions

(Unit : mm)

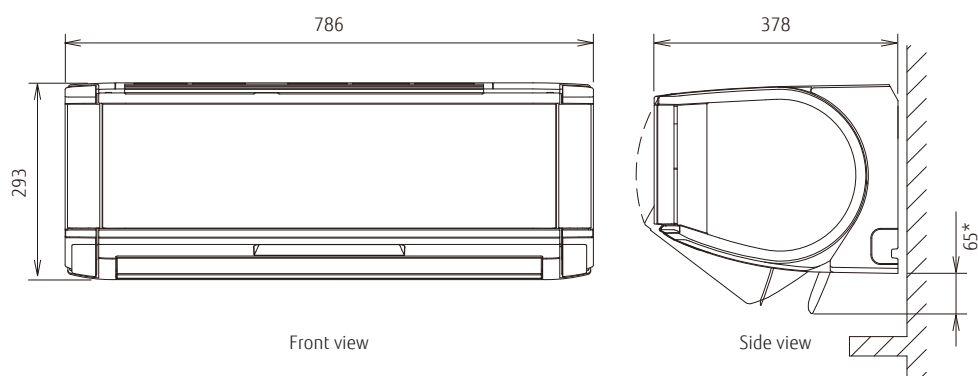

*Dimensions in case of air flowing downward