

G2E120-AR38-01

AC centrifugal fan

forward curved, single inlet
with housing (flange)



Nominal data

| | | | |
|-------------------------------|-------------------|------|------|
| Type | G2E120-AR38-01 | | |
| Motor | M2E068-BF | | |
| Phase | | 1~ | 1~ |
| Nominal voltage | VAC | 230 | 230 |
| Frequency | Hz | 50 | 60 |
| Type of data definition | | fa | fa |
| Valid for approval / standard | | CE | CE |
| Speed | min ⁻¹ | 2500 | 2600 |
| Power input | W | 83 | 110 |
| Current draw | A | 0.37 | 0.5 |
| Motor capacitor | µF | 2 | 2 |
| Capacitor voltage | VDB | 450 | 450 |
| Min. back pressure | Pa | 0 | 0 |
| Max. ambient temperature | °C | 50 | 60 |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



G2E120-AR38-01

AC centrifugal fan

forward curved, single inlet

with housing (flange)

Technical features


| | |
|---|--|
| Mass | 2 kg |
| Size | 120 mm |
| Material of impeller | Sheet steel, hot-galvanised; Sheet steel, galvanised |
| Housing material | Die-cast aluminium |
| Direction of rotation | Clockwise, seen on rotor |
| Type of protection | IP 44; Depending on installation and position |
| Insulation class | "B" |
| Humidity class | F0 |
| Max. permissible ambient motor temp. (transp./ storage) | + 80 °C |
| Min. permissible ambient motor temp. (transp./storage) | - 40 °C |
| Mounting position | Any |
| Condensate discharge holes | None |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Protection class | I (if protective earth is connected by customer) |
| Product conforming to standard | EN 60335-1; CE |



AC centrifugal fan


forward curved, single inlet
with housing (flange)

Product drawing

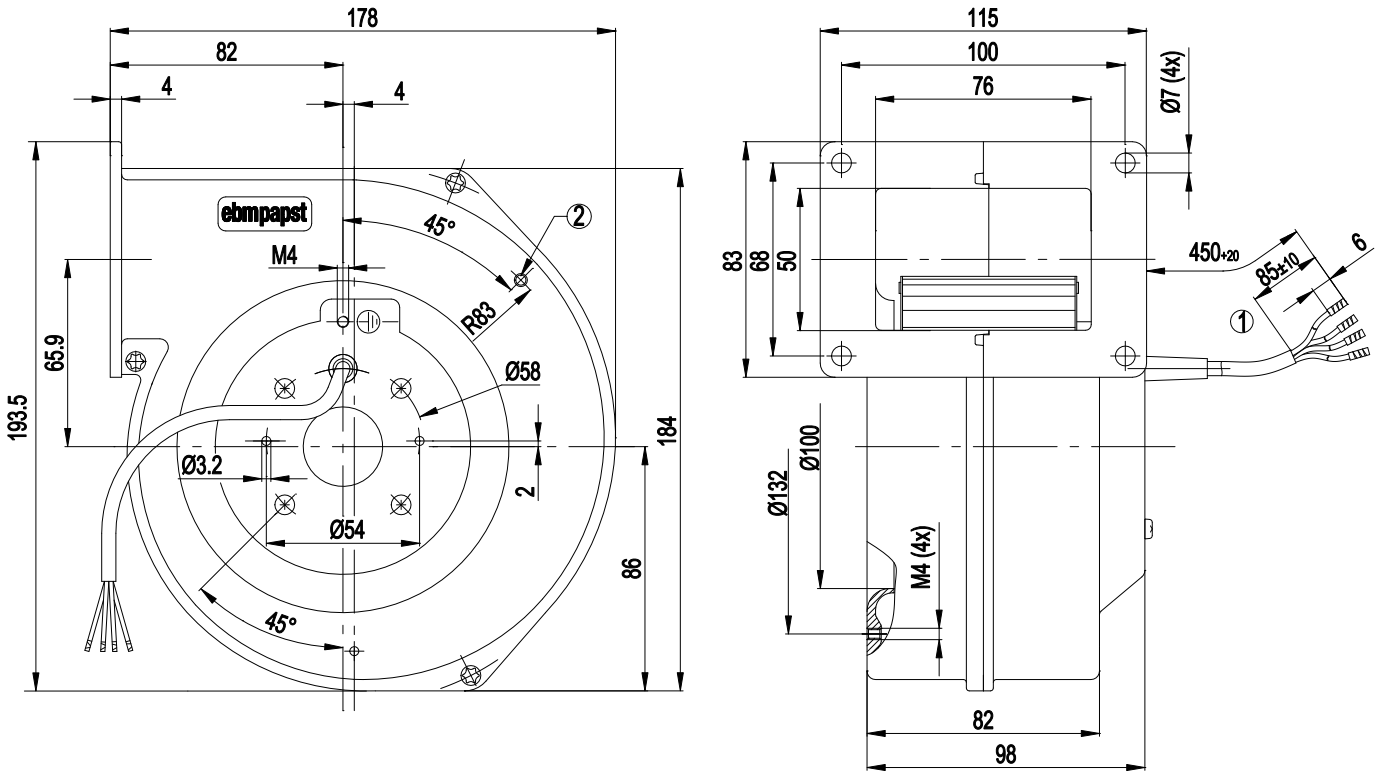

- 1 Connection line PVC 4G 0.5mm², 4x brass lead tips crimped
- 2 Pilot hole for self-tapping M4 thread


Connection screen

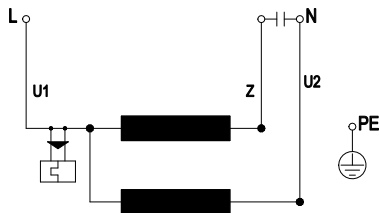

| | | | | | |
|----|--------------|---|-------|----|-------|
| U1 | blue | Z | brown | U2 | black |
| PE | green/yellow | | | | |



Charts: Air flow 50 Hz

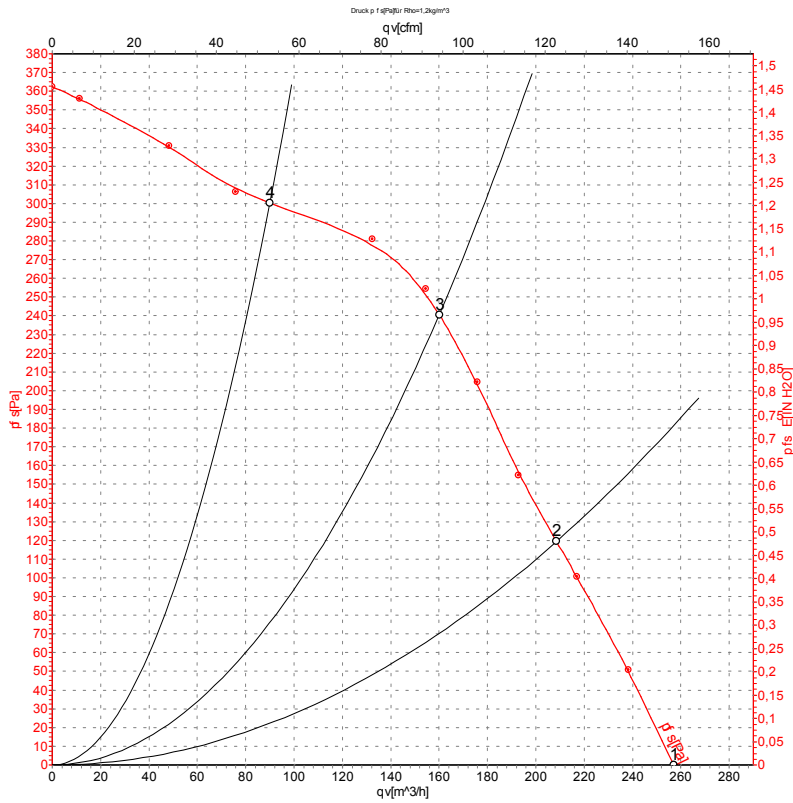

Measurement: LU-4577

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 50 | 2500 | 83 | 0.37 | 255 | 0 |
| 2 | 230 | 50 | 2620 | 78 | 0.35 | 210 | 120 |
| 3 | 230 | 50 | 2715 | 73 | 0.33 | 160 | 240 |
| 4 | 230 | 50 | 2805 | 68 | 0.32 | 90 | 300 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase



Charts: Air flow 60 Hz

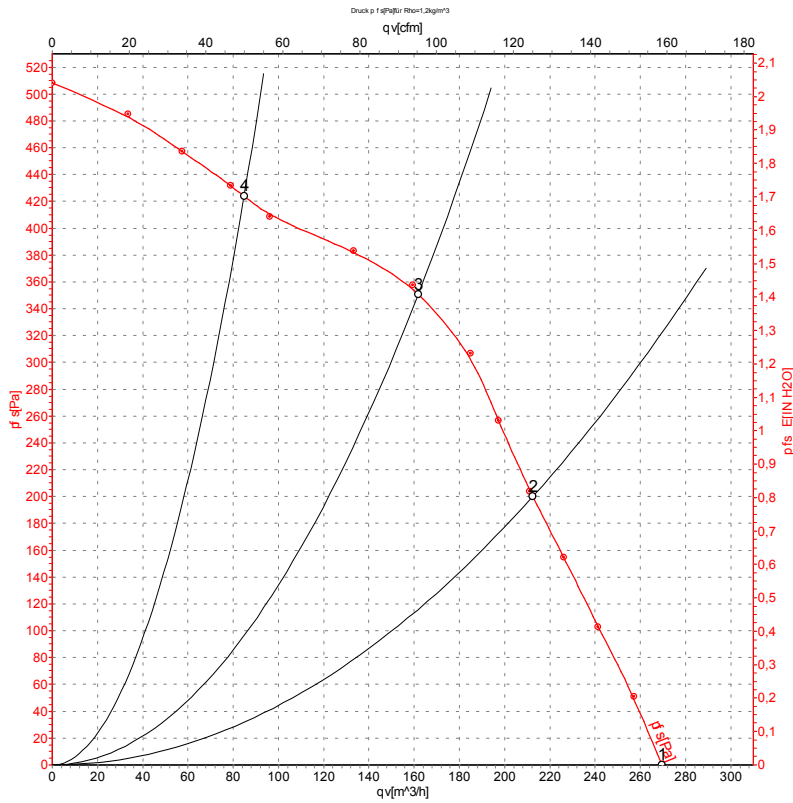

Measurement: LU-4580

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _e | I | qv | P _{fs} |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
| | V | Hz | min ⁻¹ | W | A | m ³ /h | Pa |
| 1 | 230 | 60 | 2600 | 110 | 0.50 | 270 | 0 |
| 2 | 230 | 60 | 2965 | 97 | 0.42 | 210 | 200 |
| 3 | 230 | 60 | 3145 | 89 | 0.39 | 160 | 350 |
| 4 | 230 | 60 | 3325 | 80 | 0.35 | 85 | 425 |

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · P_{fs} = Pressure increase