

PRODUCT LINEUP: MULTI SPLIT



5-6 Rooms
Multi

ALL
DC

5 Rooms: AOHG36LBLA5
6 Rooms: AOHG45LBLA6




Specifications (5 ROOMS, 6 ROOMS)

| Model No. | Outdoor unit | | AOHG36LBLA5 | AOHG45LBLA6 |
|-----------------------------|---|-------|--------------------|--------------------|
| Power Source | Single-phase, ~230V, 50Hz | | | |
| Rated Capacity (min-max) | Cooling | kW | 10.0 (3.5-12.5) | 12.5 (3.5-14.0) |
| | Heating | | 12.0 (3.5-14.0) | 13.5 (3.5-16.0) |
| EER | Cooling | W/W | 4.10 | 3.50 |
| | Heating | | 4.30 | 4.00 |
| Sound Pressure Level (High) | Cooling | dB(A) | 53 | 53 |
| | Heating | | 55 | 55 |
| Sound Power Level (High) | Cooling | | 67 | 67 |
| | Heating | | 68 | 68 |
| Net Dimensions H × W × D | | | 998×970×370 | 998×970×370 |
| | Weight | | kg(lbs) | 94 (207) |
| Connection Pipe Diameter | Liquid | mm | 6.35×5 | 6.35×6 |
| | Gas | | 9.52 × 3, 12.7 × 2 | 9.52 × 4, 12.7 × 2 |
| Max. Pipe Length | Total / Each | | 80 / 25 | 80 / 25 |
| Max. Height Difference | Between Outdoor Unit and Each Indoor Units. | | 15 | 15 |
| | Between Indoor Units. | | 10 | 10 |
| Operation Range | Cooling | °CDB | -10 to 46 | -10 to 46 |
| | Heating | | -15 to 24 | -15 to 24 |
| Refrigerant | Type (Global Warming Potential) | | R410A (2,088) | R410A (2,088) |
| | Charge | | kg(CO2eq-T) | 4.00 (8.4) |

Wide range of indoor units with various models

6 types 26 models are lined up in the capacity range from 2 kW to 7 kW class. Wide range of needs can be met from rooms of private homes to large shops and hotels.

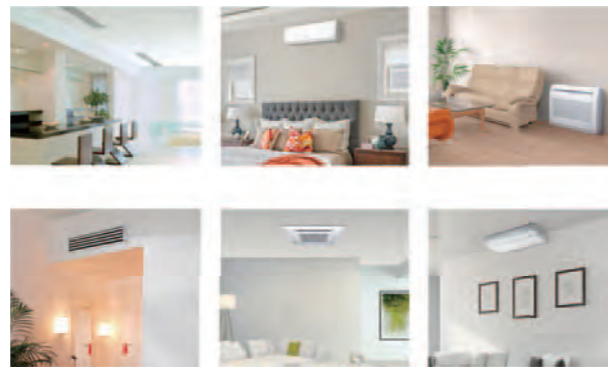


Compact design

Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.



Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once

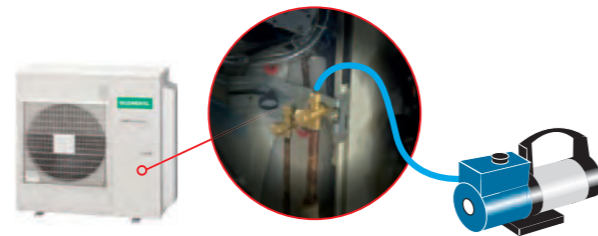

Central & Individual Control

- Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.
- Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)
- Large backlight LED screen
- Large easy-to-see operation panel

Max. Controllable
1 multi system
Max. Controllable
6 indoor units



Dimensions

(Unit : mm)

