


# DATA SHEET

EM 315 E2M 01 | 130677

**ruck**.eu  
VENTILATOREN

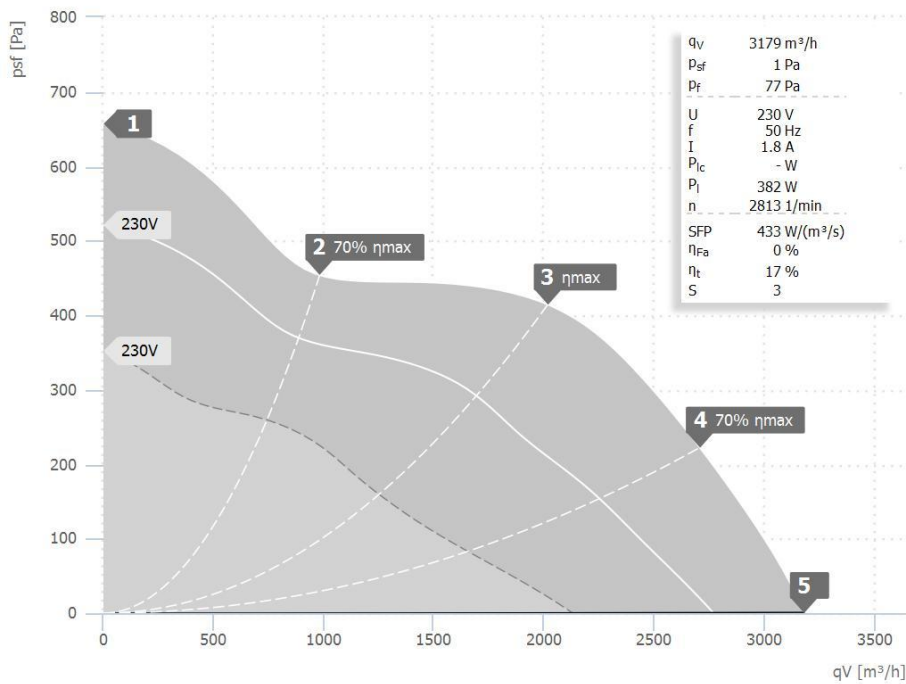

- Diagonal impeller with stator
- With Plastic housing
- 3-step
- Integrated thermostatic switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	1,6	1,5	1,9	1,9	1,8
Power Consumption P <sub>l</sub>	W	344	322	421	428	382
RPM n	1/min	2838	2852	2778	2775	2813
SPL inlet L <sub>WA5</sub>	dB(A)	83	81	82	80	81
SPL outlet L <sub>WA6</sub>	dB(A)	87	85	84	83	85
SPL casing break out L <sub>WA2</sub>	dB(A)	69	69	68	66	67

Sound power (L <sub>W</sub> ) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L <sub>WA5</sub>	81	38	51	67	75	75	74	74	67
Outlet	L <sub>WA6</sub>	85	37	52	70	81	79	77	75	68
Casing	L <sub>WA2</sub>	68	36	39	61	60	65	55	50	42

EM 315 E2M 01   130677	
Voltage U <sub>N</sub>	230 V 1~
Current I <sub>max</sub>	2,1
Ambient Temperature t <sub>A</sub>	55 °C
Medium temperatures t <sub>M</sub>	55 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	12,3 kg

