

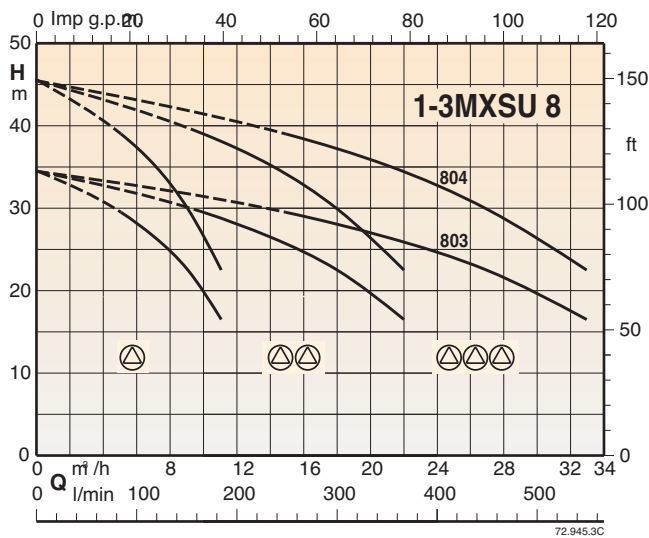
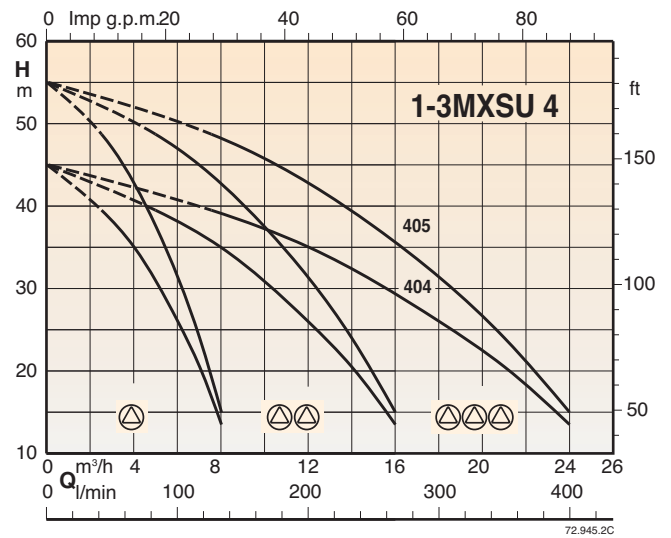


## Характеристические кривые

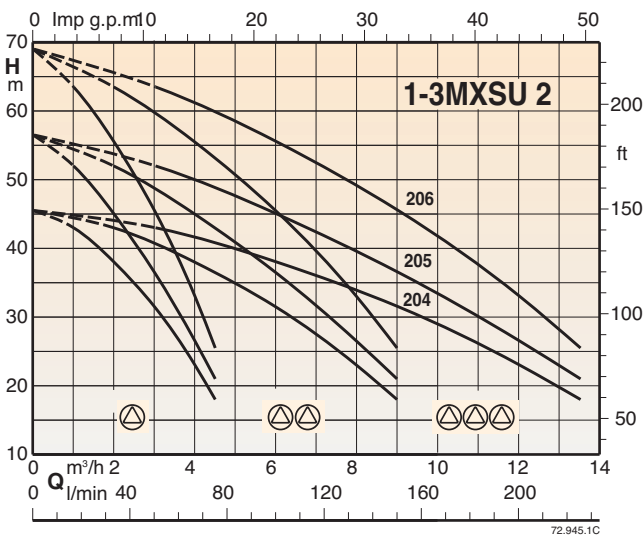

## Тех. характеристики, габариты и вес

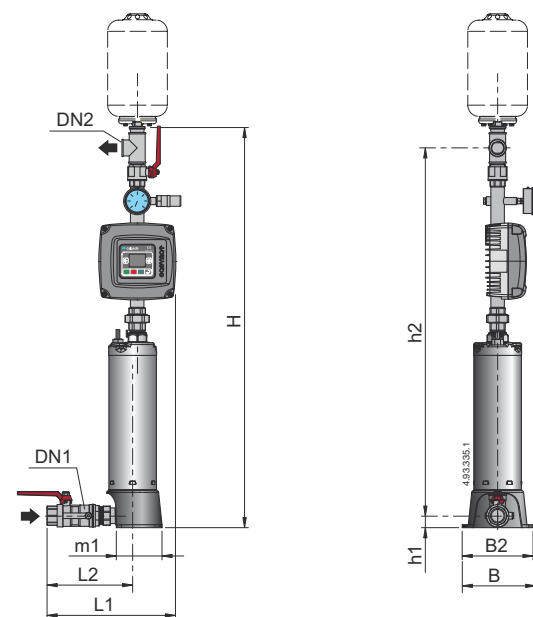

Питание: 1 ~ 230 V Двигатель: 3 ~ 230 V	Питание A	Двигатель A	Питание: 1 ~ 230 V Двигатель: 1 ~ 230 V	A	P2		DN1	DN2	mm										
					kW	HP			H	h1	h2	L1	L2	m1	B	B2			
BSM1V 1MXSU 204/A-EMT	3,9	2,7	BSM1V 1MXSUM 204/A-EMM	4,1	0,55	0,75			1071	973									
BSM1V 1MXSU 205/A-EMT	4,7	3,3	BSM1V 1MXSUM 205/A-EMM	5	0,75	1	G 1 1/4	G 1 1/4	1095	997	304	225	123	190	190				
BSM1V 1MXSU 206/A-EMT	5,4	3,8			0,9	1,2			1119	1021									
BSM1V 1MXSU 404/A-EMT	5,4	3,8			0,9	1,2			1071	973									
BSM1V 1MXSU 405/A-EMT	6,4	4,5			1,1	1,5	G 1 1/4	G 1 1/4	1095	997	304	225	123	190	190				
BSM1V 1MXSU 803/A-EMT	6,4	4,5			1,1	1,5			1095	997									
BSM1V 1MXSU 804/A-EMT	9,4	6,6			1,5	2	G 1 1/4	G 1 1/4	1095	997	304	225	123	190	190				