




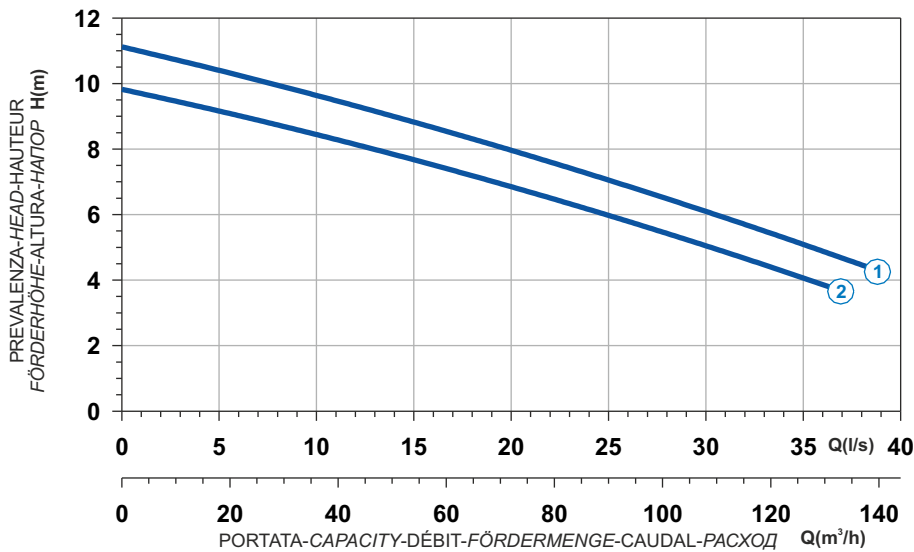

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая



H

| Curve N° | Code | Type | MOTOR | | | ATEX code  |
|----------|---------|-----------------|---------------------|---------------------|-------------------------|---|
| | | | Rated power P2 (kW) | Rated current I (A) | Starting current Is (A) | |
| 1 | 7000619 | G410R2H3-P50AA2 | 3,9 | 7,9 | 39,5 | 7001207 |
| 2 | 7008258 | G410R2H2-P50AA2 | 3 | 5,8 | 26,1 | 7009191 |

| | |
|-------------------|-------------------|
| Power supply | 3ph 400/690V 50Hz |
| R.P.M. | 1450 |
| Free passage (mm) | 50 |
| Discharge (mm) | DN 100 |
| Max Weight (Kg) | 91 |

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

▽ LIVELLO MINIMO DI SOMMERSIBILITÀ
 MINIMUM SUBMERSIBLE LEVEL
 NIVEAU MINIMUM D'IMMERSION
 MINDESTWASSERSTAND
 NIVEL SUMERGIBLE MÍNIMO
 МИНИМАЛЬНАЯ ГЛУБИНА ПОГРУЖЕНИЯ

