




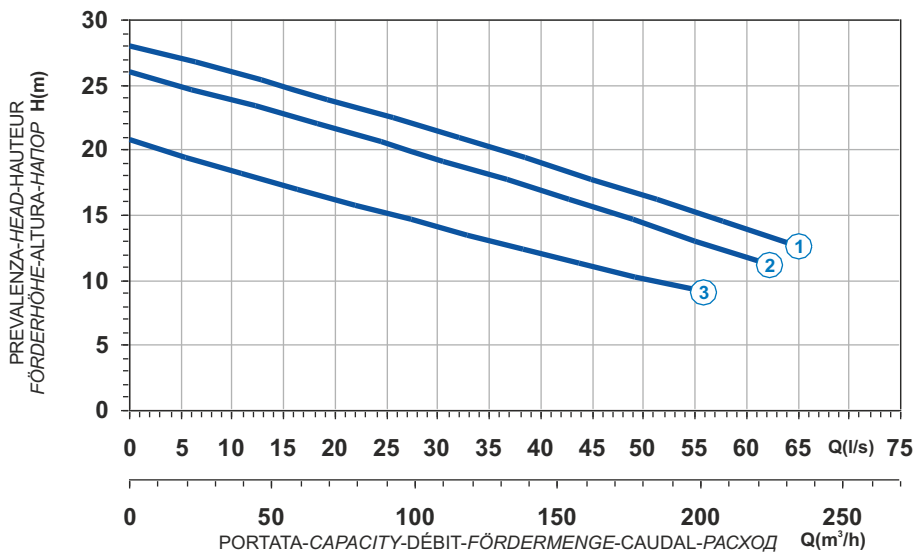

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
 Kennlinie - Curva característica - Характеристическая кривая



Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7009419	G413R2J1-P60AA2	18	33,7	199	7005908
2	7004474	G413R2J2-P60AA2	16	29,7	175	7005926
3	7009449	G413R2J4-P60AA2	11,6	21,6	127	7007998

Power supply	3ph 400/690V 50Hz
R.P.M.	1450
Free passage (mm)	60
Discharge (mm)	DN 100
Max Weight (Kg)	245

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

