

Ghisa EN-GJL-250

Fonte EN-GJL-250


Hierro fundido EN-GJL-250

Cast Iron EN-GJL-250

Grauguss EN-GJL-250

Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique  
Kennlinie - Curva característica - Характеристическая кривая

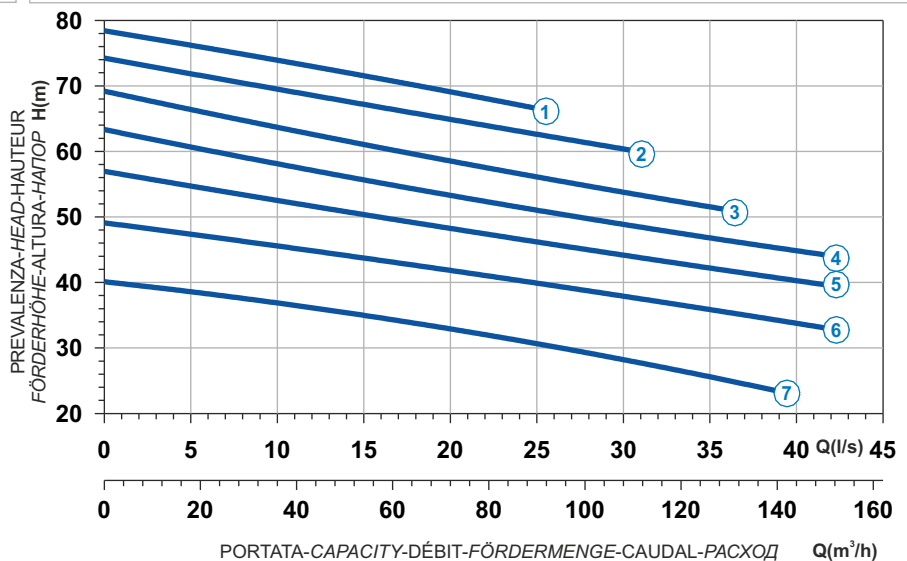

Power supply	3ph 400/690V 50Hz
R.P.M.	2850
Free passage (mm)	86
Discharge (mm)	DN 100
Max Weight (Kg)	410

Curve N°	Code	Type	MOTOR			ATEX code	
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)		
1	7001891	G218R3V1-P86AA2	52	90,1	532	7005975	
2	7000926	G218R3V2-P86AA2	52	90,1	532	7005858	
3	7001055	G218R3V4-P86AA2	52	90,1	532	7002936	
4	7001011	G218R3V3-P86AA2	52	90,1	532	7001667	
5	7001120	G218R3V6-P86AA2	45	78,3	462	7003348	
6	7000941	G218R3V7-P86AA2	40,2	71	419	7004758	
7	7000935	G218R3V8-P86AA2	35	61,8	365	7003299	

## Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

