



Ghisa EN-GJL-250

Fonte EN-GJL-250


Hierro fundido EN-GJL-250

Cast Iron EN-GJL-250

Grauguss EN-GJL-250

Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique  
Kennlinie - Curva característica - Характеристическая кривая

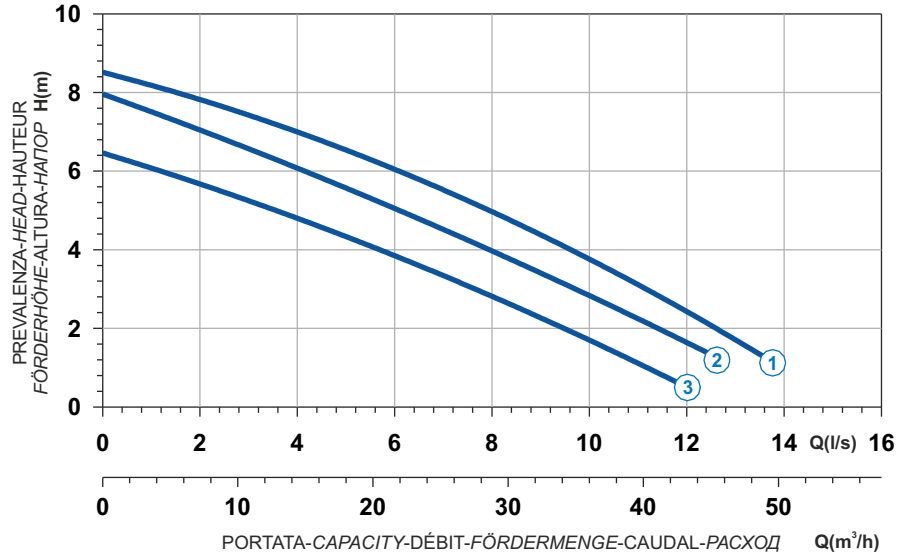

Power supply	1ph 230V 50Hz
R.P.M.	1450
Free passage (mm)	50
Discharge (mm)	DN 65
Max Weight (Kg)	43

Curve N°	Code	Type	MOTOR			ATEX code
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7002285	G471M6V1-L50AB1	1,6	9,2	46	7002822
2	7002286	G471M6V2-L50AB1	1,4	8,1	40,5	7002823
3	7002287	G471M6V3-L50AB1	1,2	6,9	34,5	7002824

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

▽ LIVELLO MINIMO DI SOMMERGIBILITÀ  
MINIMUM SUBMERSIBLE LEVEL  
NIVEAU MINIMUM D'IMMERSION  
MINDESTWASSERSTAND  
NIVEL SUMERGIBLE MÍNIMO  
МИНИМАЛЬНАЯ ГЛУБИНА ПОГРУЖЕНИЯ

