

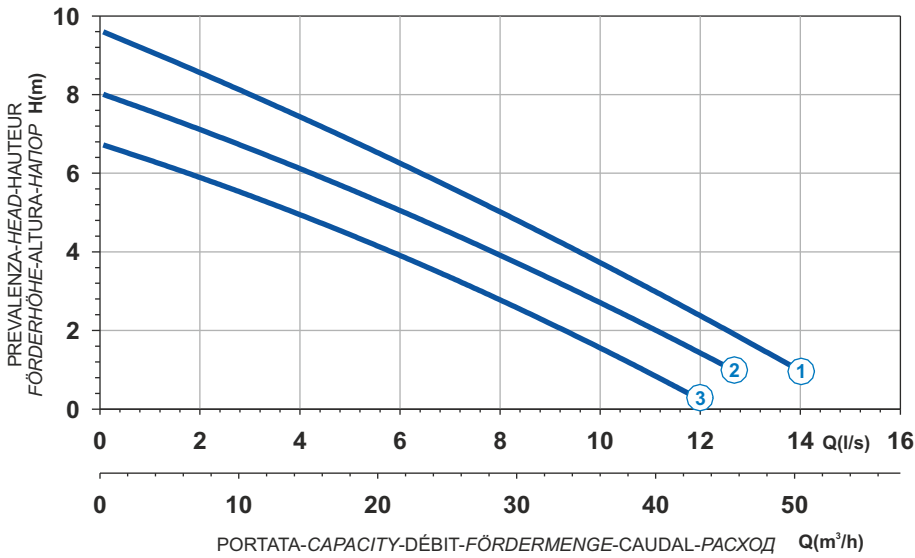

 Ghisa EN-GJL-250
 Fonte EN-GJL-250
 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250
 Grauguss EN-GJL-250
 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая



V

Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7002047	G471T6V1-L50AA0	1,6	3,1	14	7002702
2	7002048	G471T6V2-L50AA0	1,4	2,7	12,2	7003843
3	7002049	G471T6V3-L50AA0	1,1	2,4	10,8	7002811

Power supply	3ph 400V 50Hz
R.P.M.	1450
Free passage (mm)	50
Discharge (mm)	DN 65
Max Weight (Kg)	42

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

