



 Ghisa EN-GJL-250

 Fonte EN-GJL-250


 Hierro fundido EN-GJL-250

 Cast Iron EN-GJL-250


 Grauguss EN-GJL-250

 Чугун EN-GJL-250

Curva caratteristica - Performance curve - Courbe caractéristique
Kennlinie - Curva característica - Характеристическая кривая

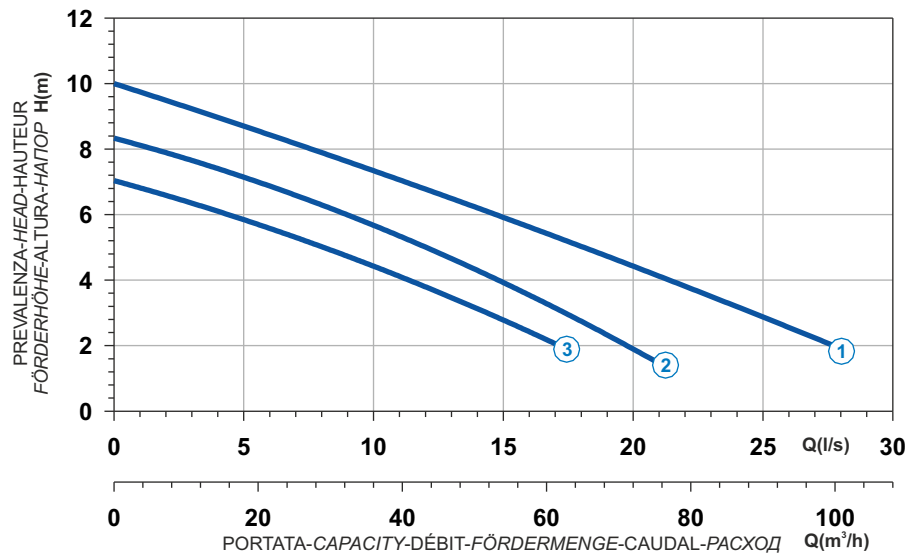

Power supply	3ph 400V 50Hz
R.P.M.	1450
Free passage (mm)	64
Discharge (mm)	DN 80
Max Weight (Kg)	64

Curve N°	Code	Type	MOTOR			ATEX code 
			Rated power P2 (kW)	Rated current I (A)	Starting current Is (A)	
1	7002013	G409T6V1-M64AA0	3,2	6,2	27,9	7002794
2	7005119	G409T6V3-M64AA0	2,3	4,4	19,8	7001022
3	7001079	G409T6V5-M64AA0	1,9	3,7	16,7	7001870

Dimensioni - Dimensions - Dimensions - Abmessungen - Dimensiones - Габариты (mm)

▽ LIVELLO MINIMO DI SOMMERGIBILITÀ
MINIMUM SUBMERSIBLE LEVEL
NIVEAU MINIMUM D'IMMERSION
MINDESTWASSERSTAND
NIVEL SUMERGIBLE MÍNIMO
МИНИМАЛЬНАЯ ГЛУБИНА ПОГРУЖЕНИЯ

