




ACOPEL F400 N

Круглые гибкие вставки. Имеют предел огнестойкости 400°С / 2 часа.

Модель	Ø А	В
ACOPEL F400-120/160 N	115	160
ACOPEL F400-140/160 N	128	160
ACOPEL F400-160/160 N	163	160
ACOPEL F400-180/160 N	190	160
ACOPEL F400-200/160 N	203	160
ACOPEL F400-225/160 N	227	160
ACOPEL F400-250/160 N	260	160
ACOPEL F400-280/160 N	283	160
ACOPEL F400-315/160 N	323	160
ACOPEL F400-355/160 N	365	160
ACOPEL F400-400/160 N	410	160
ACOPEL F400-450/160 N	458	160
ACOPEL F400-500/160 N	510	160
ACOPEL F400-560/160 N	568	160
ACOPEL F400-630/160 N	640	160
ACOPEL F400-710/180 N	721	180
ACOPEL F400-800/180 N	809	180
ACOPEL F400-900/180 N	909	180
ACOPEL F400-1000/180 N	1010	180
ACOPEL F400-1250/200 N	1260	200
ACOPEL F400-1400/200N	1410	200
ACOPEL F400-1600/200 N	1610	200

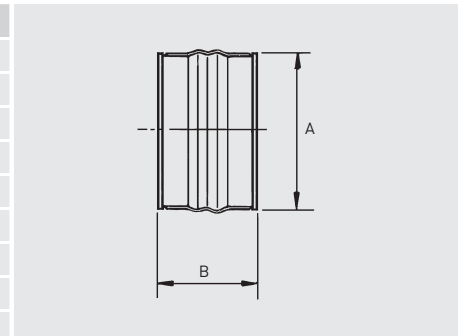


Размеры (мм).



ACOPEL EX N

Круглые гибкие вставки для взрывозащищенных вентиляторов.

Модель	Ø А	В
ACOPEL EX-160/160 N	160	160
ACOPEL EX-200/160 N	200	160
ACOPEL EX-225/160 N	225	160
ACOPEL EX-250/160 N	250	160
ACOPEL EX-280/160 N	280	160
ACOPEL EX-315/160 N	315	160
ACOPEL EX-355/160 N	355	160
ACOPEL EX-400/160 N	400	160
ACOPEL EX-450/160 N	450	160
ACOPEL EX-500/160 N	500	160
ACOPEL EX-560/160 N	560	160
ACOPEL EX-630/160 N	630	160
ACOPEL EX-710/180 N	710	180
ACOPEL EX-800/180 N	800	180
ACOPEL EX-900/180 N	900	180
ACOPEL EX-1000/180 N	1000	180
ACOPEL EX-1250/200 N	1250	200
ACOPEL EX-1400/200 N	1400	200
ACOPEL EX-1600/200 N	1600	200

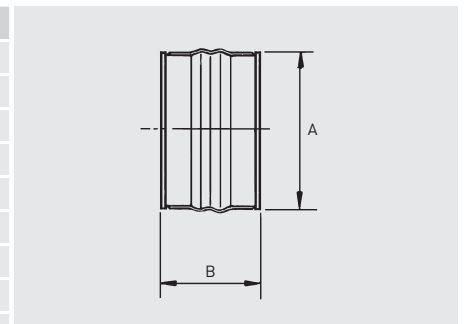

Размеры (мм).