


# Tangential blowers

## QL 4 with double housing

- impeller diameter 40 mm
- airflow direction of 180° possible
- horizontal mounting position
- permissible ambient temperature 0 - 60°C
- insulation class B, class F or H on request

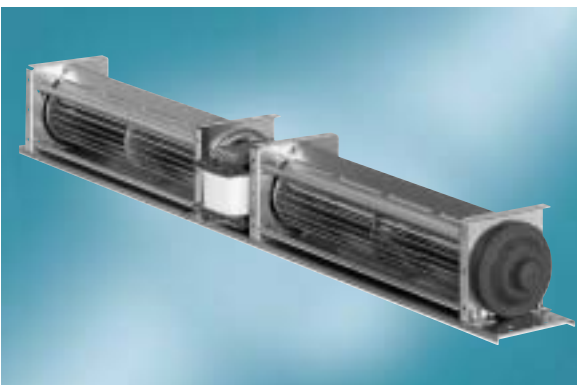

ebm-papst • Landshut

Nominal data	characteristic curve	rated voltage	frequency	air flow	max. pressure increase	power input	rated current	speed	mass	Dimensions mm					
										type	V	Hz	m <sup>3</sup> /h	Pa	W
QL4/2020-2124	①	230	50	155	10	16	130	1900	1,2	522	72	200	210	515	530
QL4/2525-2124	②	230	50	180	9	16	135	1700	1,3	622	72	250	260	615	630
QL4/3030-2124	③	230	50	190	8	17	140	1500	1,4	722	72	300	310	715	730

Technical data valid at free air flow and rated voltage; bold print = standard type; subject to alterations

### Characteristic curves

