


Radial blowers with AC internal-rotor motor

RLF 67

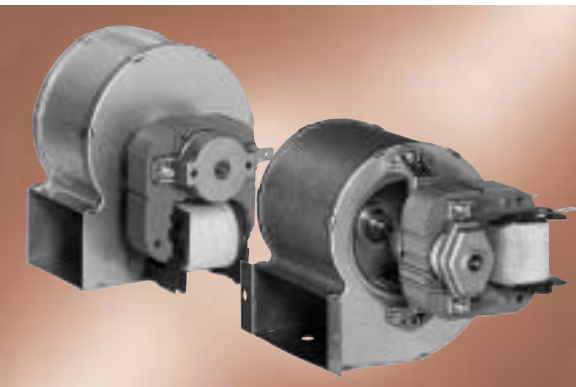

- mounting position: shaft horizontal
- insulation class B
- permissible ambient temperature 0 – 60 °C
- housing: galvanized sheet steel
- impeller: forward curved, aluminium (galvanized sheet steel)

ebm-papst • Landshut

Nominal data		characteristic curve	rated voltage	frequency	air flow	max. pressure increase	power input	rated current	speed	mass	Dimensions mm			
motor right*	motor left		V	Hz	m ³ /h	Pa	W	mA	min ⁻¹	kg	a	b	c	d
RLF67/3800-3015L	RLF67/0038-3015L	①	230	50	40	73	12	90	2000	0,7	104	49	38	70
RLF67/7600Z-3025L	RLF67/0076Z-3025L	②	230	50	125	115	27	220	2500	1,2	164	92	76	113

*) Corresponding to dimensional drawing; Technical data valid at free air flow and rated voltage; bold print = standard type; subject to alterations

Characteristic curves

