


Hot air blowers

R2A150AC, R2A150AA


- bearing: sintered sleeve bearings with additional lubricant depot
- mounting position: horizontal shaft
- impeller: R2A150AC stainless steel
R2A150AA die-cast aluminium
- insulation class: H (EN 60335)

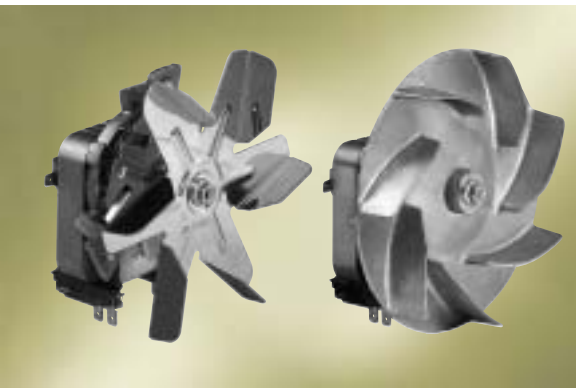


Nominal data	rated voltage	frequency	air flow	max. pressure increase	power input	speed	mass	recommended air intake	Dimensions mm	
	V	Hz	m³/h	Pa	W	min⁻¹	kg	Ø	L1	LG
R2A150-AC	230	50	170	140	32	1800	1	120	21	98
R2A150-AA	230	50	190	180	30	2000	1,1	120	18,4	102,5

Technical data valid for typical applications; bold print = standard type; subject to alterations


R2A150AC




view without impeller

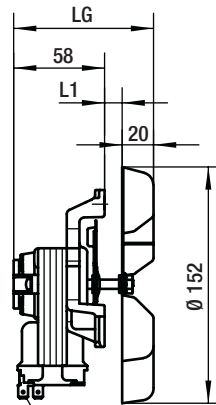


connector 6,3 x 0,8



R2A150AA



view without impeller

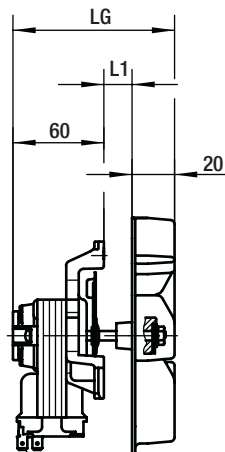

connector 6,3 x 0,8

