



Floor Standing (with casing) FDFL

Floor Standing (without casing) FDFU

Model No.

FDFL71KXE6F

FDFU28KXE6F


FDFU45KXE6F

FDFU56KXE6F

FDFU71KXE6F



FDFL

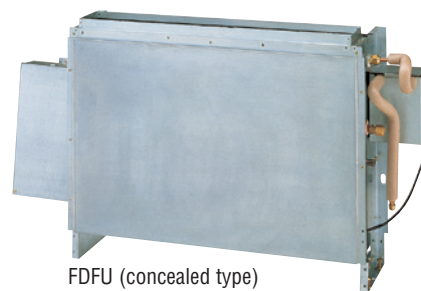

FDFU (concealed type)

Remote control (option)

Wired



RC-EX3A



RC-E5



RCH-E3


Wireless



RCN-KIT4-E2



Compact design at 630mm height

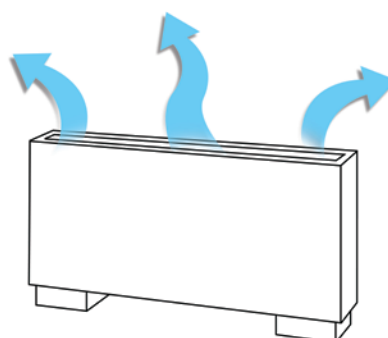

Wider airflow for optimum comfort

Specifications


Item	Model	FDFL71KXE6F	FDFU28KXE6F	FDFU45KXE6F	FDFU56KXE6F	FDFU71KXE6F
Nominal cooling capacity	kW	7.1	2.8	4.5	5.6	7.1
Nominal heating capacity	kW	8.0	3.2	5.0	6.3	8.0
Power source		1 Phase 220-240V, 50Hz				
Power consumption	Cooling	0.09-0.10			0.09-0.10	
	Heating	0.09-0.10			0.09-0.10	
Sound power level	dB(A)	62	58		60	
Sound pressure level	dB(A)	Hi:43 Me:41 Lo:40	Hi:41 Me:38 Lo:36		Hi:43 Me:41 Lo:40	
Exterior dimensions H x W x D	mm	630x1481x225		630x1077x225		630x1362x225
Net weight	kg	40		25		32
Air flow (Standard)	m ³ /min	Hi:18 Me:15 Lo:12	Hi:12 Me:11 Lo:10		Hi:14 Me:12 Lo:10	Hi:18 Me:15 Lo:12
Air filter, Q'ty		Polypropylene net x1 (Washable)				
Remote control(option)		wired:RC-EX3A, RC-E5, RCH-E3 wireless:RCN-KIT4-E2				
Installation data		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")	Liquid line:ø6.35(1/4") Gas line:ø9.52(3/8")	Liquid line:ø6.35(1/4") Gas line:ø12.7(1/2")		Liquid line:ø9.52(3/8") Gas line:ø15.88(5/8")

1. The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

Dimensions

All measurements in mm.


FDFL

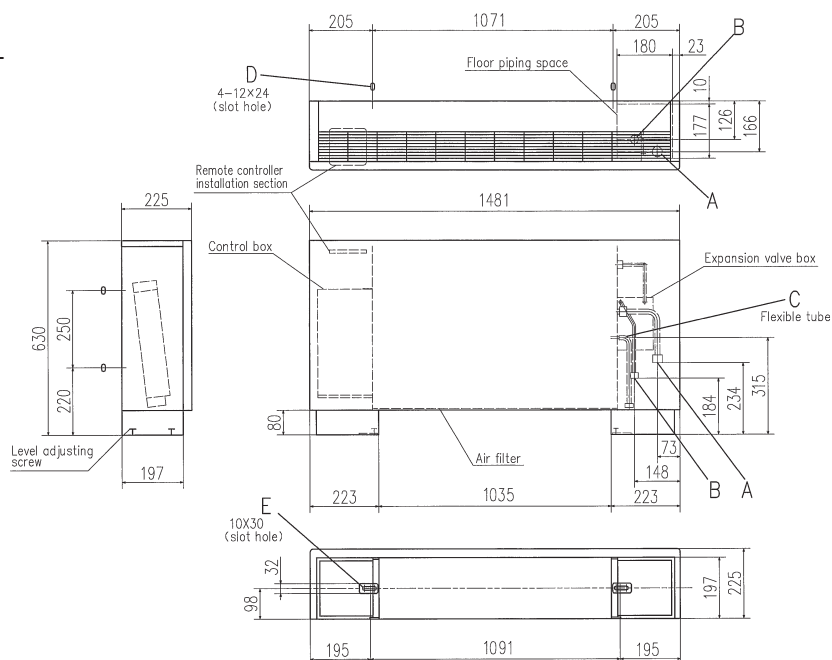


Symbol	Content
	Model FDFL71KXE6F
A	Gas piping (Accessory) $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 9.52$ (3/8") (Flare)
C	Drain piping (Accessory) PT20A female screw, 360mm
D	Slot hole for wall mounting (M10)
E	Metal plate for floor mounting (Accessory) (M8)

Note (1) The model name label is attached on the lid of the control box.

Space for installation and service




FDFU

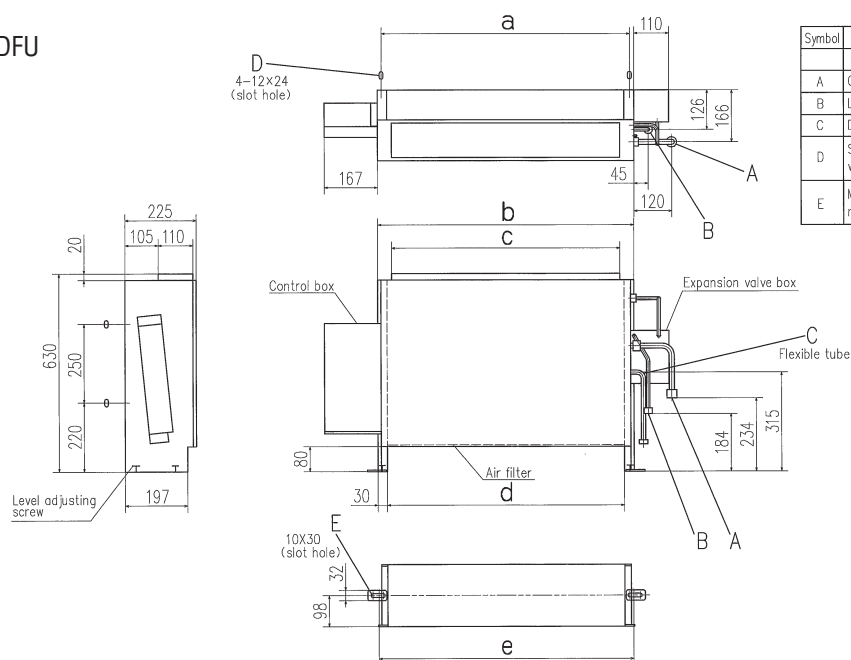

Symbol	Content
	Model FDFU28KXE6F FDFU45KXE6F, 56KXE6F FDFU71KXE6F
A	Gas piping (Accessory) $\phi 9.52$ (3/8") (Flare) $\phi 12.7$ (1/2") (Flare) $\phi 15.88$ (5/8") (Flare)
B	Liquid piping $\phi 6.35$ (1/4") (Flare) $\phi 9.52$ (3/8") (Flare)
C	Drain piping (Accessory) PT20A female screw, 360mm PT20A female screw, 360mm
D	Slot hole for wall mounting (M10) (M10)
E	Metal plate for floor mounting (Accessory) (M8) (M8)

Note (1) The model name label is attached on the lid of the control box.

Space for installation and service



Dimension Table

Unit:mm

model	a	b	c	d	e
FDFU28KXE6F, 45KXE6F, 56KXE6F	786	810	722	750	806
FDFU71KXE6F	1071	1095	1007	1035	1091