



#### VERTICAL LIQUID RECEIVERS (RDG SERIES)


Our vertical receivers capacities are 25lt and 30lt. We can make production of different capacity receivers upon request. Liquid receiver are used to send liquid phase refrigerant to the expansion valve. Also liquid receivers can stock the refrigerant inside when there is a repair needed in the system. It is not allowed to fill the liquid receivers over 90% at 40°C.

Working Pressure : 33 Bar  
Working Temperature : -10 / 120 °C

#### ВЕРТИКАЛЬНЫЕ ЖИДКОСТНЫЕ РЕСИВЕРЫ (СЕРИИ RDG)

Наши вертикальные ресиверы имеют объём от 25 до 30 литров. Мы так же можем произвести продукцию разного объёма по запросу клиента. Жидкостные ресиверы используются для передачи хладагента в жидкостной фазе в расширительный клапан. Так же ресиверы могут складировать хладагент во время ремонта в системе. При температуре более 40°C недопускается заполнение ресивера более чем на 90%.

Рабочее давление : 33 бар  
Рабочая Температура : -10 / 120 °C

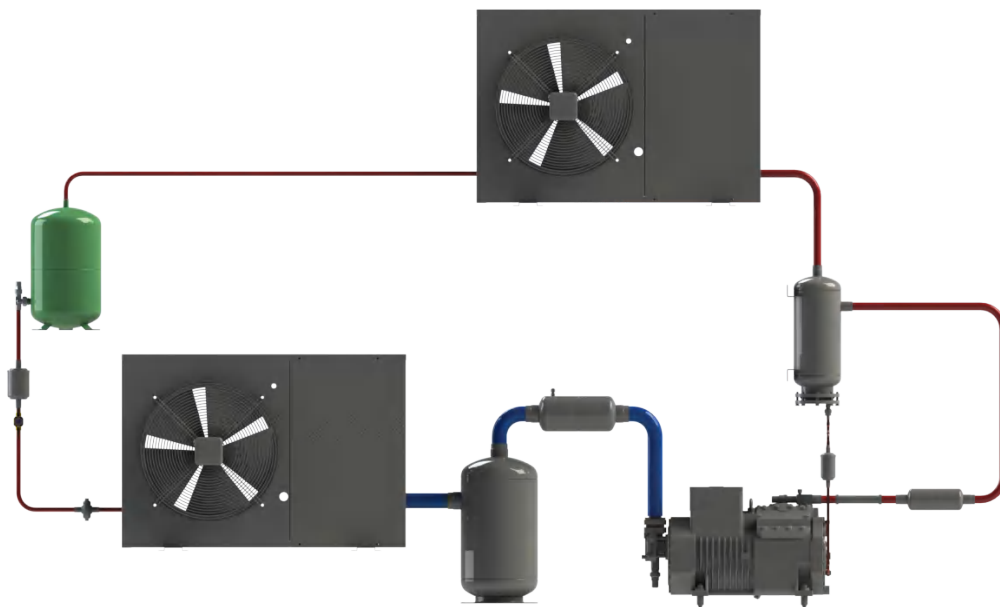

TECHNICAL DATA									ТЕХНИЧЕСКИЕ ДАННЫЕ		
Code Код	Type Тип	Draw. Черт.	V	ø D	H	h1	h2	Connections Подсоединения			
								Inlet Вход	Outlet Выход	Safety Valve Предохранительный Клапан	
B17-20-52A	RDG 20 A SOLDER	fig.a	20	219	640	-	-	16,1 ODS	16,1 ODS		
B17-20-50A	RDG 20 A ODS				665				RV 16,1 ODS		
B17-20-52B	RDG 20 B SOLDER	fig.b			640	-	-		16,1 ODS	✓	
B17-20-50B	RDG 20 B ODS				665				RV 16,1 ODS	✓	
B17-20-52C	RDG 20 C SOLDER	fig.c			644	459	-		150	16,1 ODS	✓
B17-20-50C	RDG 20 C ODS				644					RV 16,1 ODS	✓
B17-20-52D	RDG 20 D SOLDER	fig.d			640	-	-			16,1 ODS	
B17-20-50D	RDG 20 D ODS				640					RV 16,1 ODS	
B17-20-52E	RDG 20 E SOLDER	fig.e			609	459	-			16,1 ODS	
B17-20-50E	RDG 20 E ODS				609					RV 16,1 ODS	
B17-25-52A	RDG 25 A SOLDER	fig.a	25	219	799	-	-	19,1 ODS		19,1 ODS	
B17-25-50A	RDG 25 A ODS				799					RV 19,1 ODS	
B17-25-52B	RDG 25 B SOLDER	fig.b			799	-	-			19,1 ODS	✓
B17-25-50B	RDG 25 B ODS				832					RV 19,1 ODS	✓
B17-25-52C	RDG 25 C SOLDER	fig.c			799	614	-		150	19,1 ODS	✓
B17-25-50C	RDG 25 C ODS				832					RV 19,1 ODS	✓
B17-25-52D	RDG 25 D SOLDER	fig.d			799	-	-			19,1 ODS	
B17-25-50D	RDG 25 D ODS				799					RV 19,1 ODS	
B17-25-52E	RDG 25 E SOLDER	fig.e			764	614	-			19,1 ODS	
B17-25-50E	RDG 25 E ODS				764					RV 19,1 ODS	
B17-30-52A	RDG 30 A SOLDER	fig.a	30	273	647	-	-	22,5 ODS		22,5 ODS	
B17-30-50A	RDG 30 A ODS				680					RV 22,5 ODS	
B17-30-52B	RDG 30 B SOLDER	fig.b			647	-	-			22,5 ODS	✓
B17-30-50B	RDG 30 B ODS				680					RV 22,5 ODS	✓
B17-30-52C	RDG 30 C SOLDER	fig.c			647	462	-		150	22,5 ODS	✓
B17-30-50C	RDG 30 C ODS				647					RV 22,5 ODS	✓
B17-30-52D	RDG 30 D SOLDER	fig.d			647	-	-			22,5 ODS	
B17-30-50D	RDG 30 D ODS				647					RV 22,5 ODS	
B17-30-52E	RDG 30 E SOLDER	fig.e			612	462	-			22,5 ODS	
B17-30-50E	RDG 30 E ODS				612					RV 22,5 ODS	

